

ACCESSORIES

Counter wrench




The RollerDrive has a glued-on ribbed nut that is located at the bearing housing. An additional nut is used to screw the RollerDrive in the side profile. Depending on the condition of the side profile, the glued-on nut must be secured with a counter wrench while tightening the outside nut.

The counter wrench size 17 WAF fits perfectly between the flange of the ribbed nut and the bearing housing of the RollerDrive.

Article number: S-1101270

Dimensions

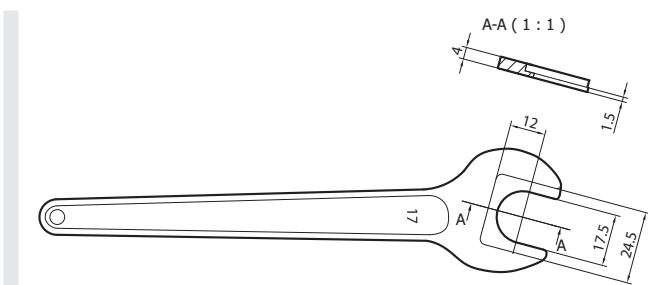

Note: Measurements in mm.

RollerDrive EC5000 extension cable




The connecting cable of the EC5000 can be extended easily with a plug connection by using the RollerDrive extension cable.

Article number: S-1113897

Technical data

- Temperature range: -22 to 104 °F
- Color: Black
- Length: 78.7"
- Outside diameter: 0.2"
- Plug connection: M8 snap-in plug and socket
- Protection rate: IP67 in connected state
- Cross sections: 3 x 0.14 mm² and 2 x 0.5 mm²
- Type designation of the cable: Li9Y11Y
- Bending radius with fixed laying: > 5 * diameter of the cable
- Bending radius with flexible application: > 10 * diameter of the cable
- Properties: Halogen-free, UL-certified cable
- Suitable for drag chains: Yes

Voltage supply flat cable

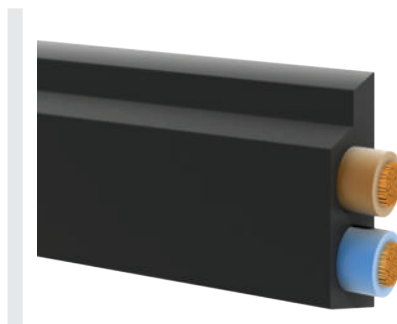

The flat cable is used for the voltage supply of ConveyorControl and MultiControl. The outer contour of the line corresponds to the standard of AS interface. The shell of the line covers holes that were created by piercing contacts. This means that the cable maintains the protection rating even after disconnecting a control.