


Cable bridge for flat cable

The cable bridge allows electrically combining two flat cables and changing the position of one flat cable. The ends of both flat cables have to point in the same direction.

Article number: S-1004028

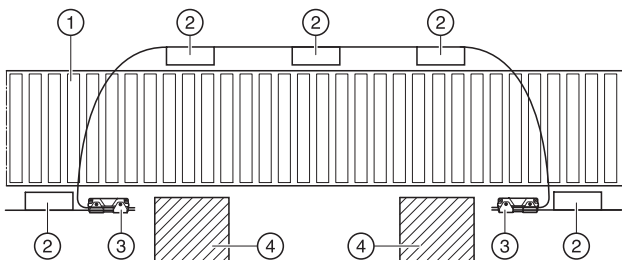

- 1 Conveyor
- 2 SegmentControl or ComControl
- 3 Cable bridge
- 4 Obstacle (wall, column or similar)

Technical data

- Temperature range: -22 to 104 °F
- Protection rate: IP54
- Suitable for the communication cable of the ConveyorControl system
- Suitable for the voltage line of the ConveyorControl system or the MultiControl: can be loaded up to 6 A

Magnetic key



The magnetic key with a high-quality neodymium magnet offers many functions. For the MultiControl, it enables switching the bus protocol or the use of the Teach-In method. For the ConveyorControl, it enables addressing or, for example, performing a self-test.

Article number: S-64100210